
电磁阀（铜、钢）DEVSC+DEVS


Solenoid Valve(Copper) (Steel)DEVSC+DEVS Type

1、技术参数 Technical Parameter


- 公称通径：DN3-DN50
  Nominal Diameter: DN3-DN50
- 适用介质：R12,R22,R502,R134a,R404a,R507,R717等制冷剂。
  Applicable Medium:R12,R22,R502,R134a,R404a,R507,R717 and other refrigerants.
- 适用温度：-40℃～+120℃
  Applicable Temperature: -40 ℃ ～ + 120 ℃




DEVSC3-25系列
DEVSC3-25 Series



DEVSC32-40系列
DEVSC32-40Series



DEVSC10-25



DEVS32,40

2、说明 Instruction

电磁阀是一种依靠电磁力自动开关的截止阀。在工业制冷装置中，常用电磁阀作为遥控截止阀、双位调节系统的调节机关或安全保护设备。它可适用于各种气体、液体制冷剂等介质。


Solenoid Valve is kind of automatic stop valve that relies on Solenoid force.In industrial refrigeration installations, Solenoid Valves are commonly used as remote-control stop valves, two-position adjustment systems, or safety protection equipment.It is suitable for various gases, liquid refrigerants and other media.






3、订货 Order Goods

- 订货时需指定型号
  Please tell us the model you want when ordering.
  DEVS20 It is means DN20 Solenoid Valve(steel).
- 例：DEVSC20 表示DN20电磁阀（铜）
  E.g.: DEVSC20 It is means DN20 Solenoid Valve(copper).
- 例：DEVS20 表示DN20电磁阀（钢）
  E.g.:DEVS20 It is means DN20 Solenoid Valve(steel).

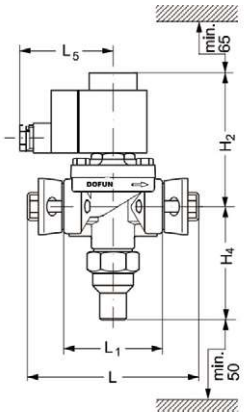

DEVS10结构示意图


DEVS10 Structure Diagram

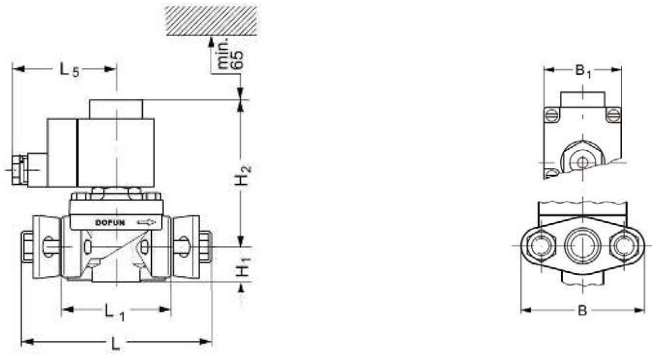


DEVS15 DEVS20结构示意图

DEVS15 DEVS20 Structure Diagram


型号 Model (DN)	H1 mm	H2 mm	H4 mm	L mm	L1 mm	Ls mm		B mm	B1（max） mm	重量 Weight (KG)
						10w	12/20w			
DEVS3		84		127	84	75	85	80	68	1.5
DEVS10	22	100	81	81	100	75	85	80	68	1.7
DEVS15		100	81	81	100	75	85	80	68	1.8
DEVS20		110	77	77	110	75	85	75	68	2.7

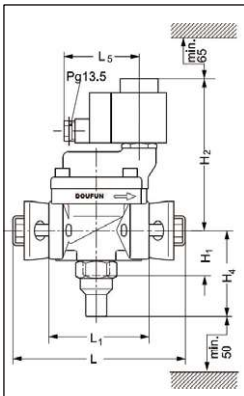




DEVS25结构示意图

DEVS25 Structure Diagram





DEVS25 DEVS32 DEVS40结构示意图

DEVS25 DEVS32 DEVS40 Structure Diagram

型号 Model (DN)	H1 mm	H2 mm	H4 mm	L mm	L1 mm	Ls mm		B mm	B1（max） mm	重量 Weight (KG)
						10w	12/20w			
DEV25	46	141	78	162	92	75	75	95	68	3.0
DEVS32	47	115	53	175		75	80	80	68	4.0
DEVS40	47	115	53	175		75	80	80	68	4.0