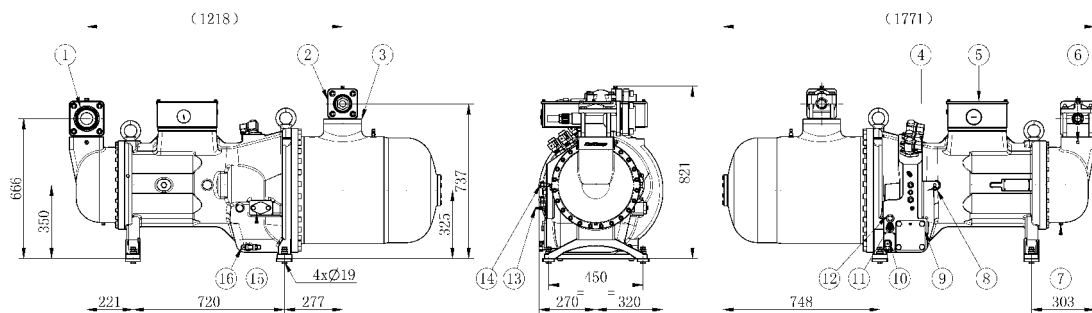


图例:

- 1-吸气截止阀
(134-S(W)选配) Ø105.5 (4-1/8")
- 2-排气截止阀 Ø80.0 (3-1/8")
- 3-止回阀
- 4-能量调节电磁阀
- 5-接线盒
- 6-低压接头 1/4" SAE-FLARE
- 7-低压侧成油口 1/4"-18 NPT
- 8-油压接头 1/4" SAE-FLARE
- 9-油过滤器
- 10-油加热器
- 11-油位开关 (选配)
- 12-油视镜
- 13-温度传感器 1/8" NPT
- 14-油冷却器接口 5/8" SAE-FLARE
- 15-喷液接口 3/8" SAE-FLARE (选配)
经济器接口 Ø28 (选配)
- 16-注油/放油阀 3/8" SAE-FLARE
- 17-高压接头 1/4" SAE-FLARE

Key:

- 1-Suction shut-off valve
(134-S(W) optional) Ø105.5 (4-1/8")
- 2-Discharge shut-off valve Ø80.0 (3-1/8")
- 3-Non return valve
- 4-Solenoid valves for part-load operation
- 5-Electrical box
- 6-Low pressure gas 1/4" SAE-FLARE
- 7-Oil drain motor housing 1/4"-18 NPT
- 8-Oil pressure 1/4" SAE-FLARE
- 9-Oil filter
- 10-Crankcase heater
- 11-Oil level control (optional)
- 12-Oil sight glass
- 13-Discharge temperature sensor 1/8" NPT
- 14-Oil cooling connection 5/8" SAE-FLARE
- 15-Liquid injection 3/8" SAE-FLARE (optional)
Eco connection Ø28 (optional)
- 16-Oil fill/drain valve 3/8" SAE-FLARE
- 17-High pressure gas 1/4" SAE-FLARE